

SEEHLRHLED16

LED HAZARDOUS LOCATION REMOTE HEAD

STANDARD



OPTIONAL



ILLUMINATION

- Two fully adjustable, ultra bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.

ELECTRICAL

- Powered from low voltage 6V/12V DC power source with low voltage wiring (not provided).

MOUNTING

- Die-cast mounting brackets provided for surface wall-mount installation.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.

HOUSING

- Housing is fiberglass reinforced construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.


OPTIONS

- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

WARRANTY / LISTING

- Five year warranty.
- UL listed with approved Best Lighting
- Products. IP66 rated for Ingress protection.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Rated for Class 1, Division 2, Groups A, B, C, and D.

DIMENSIONS

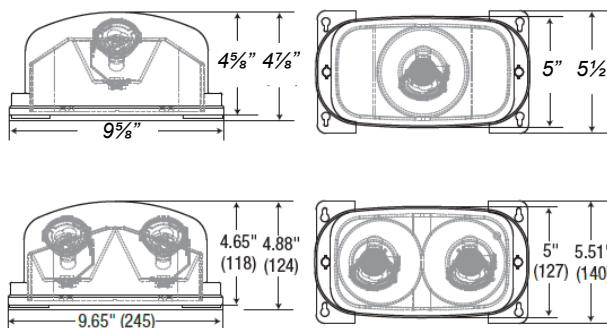

BEST LIGHTING MODEL TYPE			
CADXR	CALEDCXTE	CAR	CWLEZXTE-RC
DXR	LEDSDXR	LEDTFX-2	NYDXR
RMR-16-65/125			

ORDERING INFORMATION

Sample Part Number: **SEEHLRHLED161G**

MODEL	HEADS	HOUSING COLOR	OPTIONS
SEEHLRHLED16	1 2 Single Twin	G Gray	TP Tamper-Proof